



high elevations[®]

PERFORMANCE LIGHTING FOR LARGE VOLUME SPACES



Extraordinary performance and a wide range of aesthetic options make Elevations® unique among pendant downlighting products. Multiple housing sizes, light sources, lumen packages and distributions let you satisfy a diversity of needs while maintaining a strong sense of aesthetic continuity.

To further the capabilities of this versatile product family, Gotham® has added 10- and 14-inch apertures designed specifically for large volume spaces.

THE PERFORMANCE EDGE

Unlike most pendant downlights that provide minimal control and, in some cases, minimal shielding, High Elevations® luminaires are engineered to deliver high lumen output with minimal glare. Patented Gotham Bounding Ray™ reflector optics assure a balanced, comfortable environment. High performance compact fluorescent and metal halide systems deliver superior quality illumination, enabling you to meet the most rigorous standards for energy efficient and sustainable design. Multi-lamp compact fluorescent configurations offer a dimension of light level control via switching, dimming and daylight harvesting. Add Gotham's SIMPLY5™ lighting intelligence for a complete lighting energy management system.

CHOOSE YOUR LOOK

High Elevations pendants are available in 10-inch and 14-inch aperture sizes, offering appropriate scale for virtually any high-ceiling environment. The luminaire's simple, flowing lines complement contemporary architecture, and can be dressed up or down as desired.

You can specify High Elevations in a wide range of architectural colors. 14-inch luminaires offer an optional decorative glass element in white, blue or amber, providing perceptual luminance of the ceiling cavity. Candeo apertures are available to add a tasteful luminous accent to the 10" luminaires, while maintaining excellent downlight performance.

A BALANCED, INTEGRATED LIGHTING SCHEME

The complete Elevations family – with its many housing sizes, aperture treatments, light sources, lumen packages and distributions – lets you satisfy ambient, accent and task lighting needs throughout a space.



All Elevations pendants are visually compatible with Gotham recessed downlight apertures as well, providing design continuity among luminaires, regardless of ceiling height and structure.


Ask your Gotham lighting representative for more information on the Elevations family of pendant luminaires, and how they complement the full line of Gotham downlighting. You may also visit our website at www.gothamlighting.com.

High Elevations offers appropriate scale, advanced lighting technology and a range of appearance options to satisfy every need in large, high-ceiling environments. It expands the capabilities of the Elevations family and works visually and optically within the broad offering of Gotham high performance downlighting products.




Pendant or aircraft cable and cord mounting options are available.


High Elevations may be specified in a wide range of architectural colors. 14-inch luminaires offer decorative glass accent in white, blue and amber, providing perceptual luminance of the ceiling cavity.

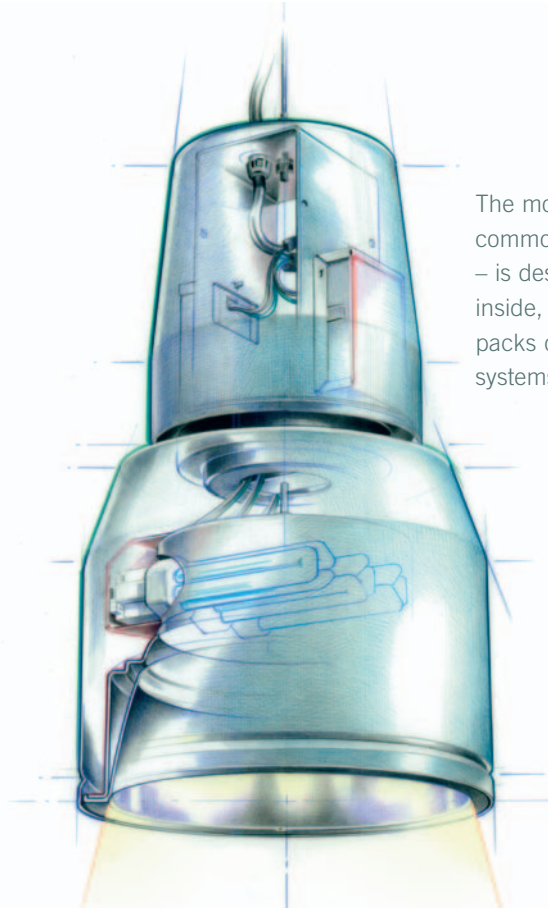

The modular ballast housing – common to 10" and 14" versions – is designed to contain all gear inside, including available EL battery packs or QRS (quartz restrike) systems.

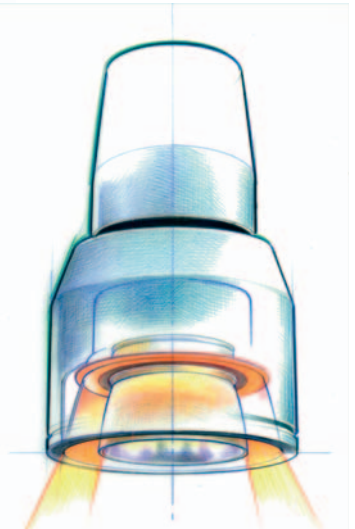

Candeo apertures are available to add a tasteful luminous accent to 10-inch luminaires.

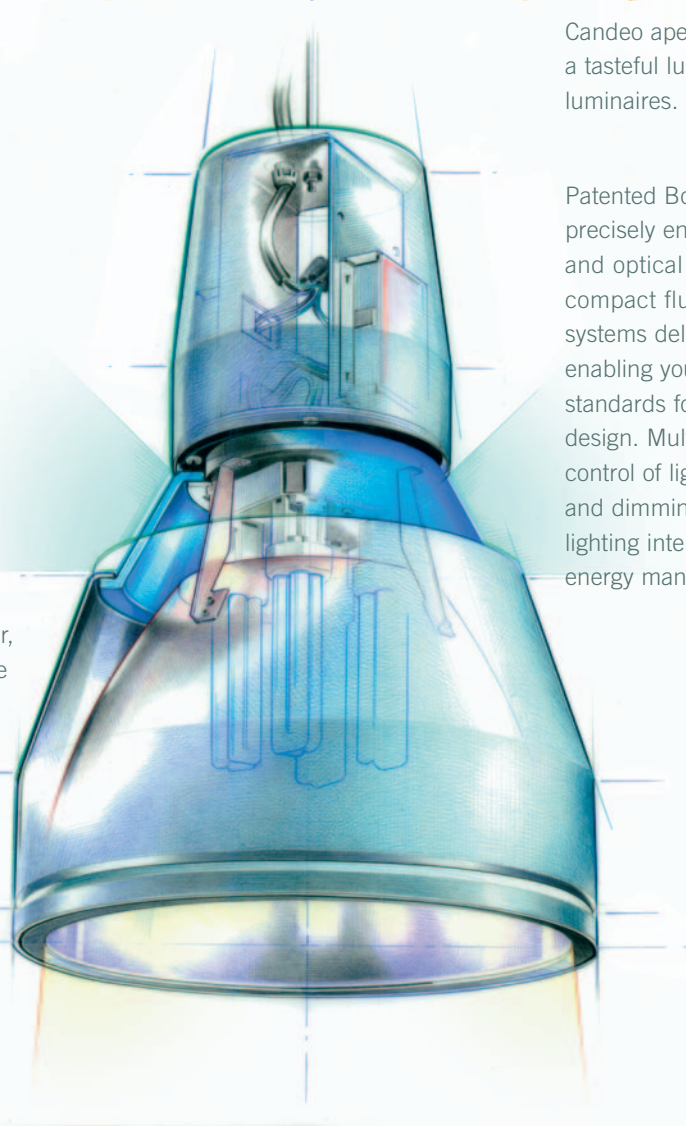

Patented Bounding Ray® reflectors are precisely engineered to optimize efficiency and optical control. High performance compact fluorescent and metal halide systems deliver superior quality illumination, enabling you to meet the most rigorous standards for energy efficient and sustainable design. Multi-lamp CFL configurations allow control of light levels via photo-cells, switching and dimming. Add Gotham's SIMPLY5™ lighting intelligence for a complete lighting energy management system.



High Elevations pendants employ patented Gotham Bounding Ray optics to deliver high efficiency illumination with minimal glare in large, high-ceiling spaces.

High Elevations with available decorative glass element adds a color accent while providing perceptual luminance of the ceiling cavity.



Gotham's Elevations family now includes performance pendants scaled for expansive architectural environments with higher mounting heights. Like other Elevations pendants, these luminaires are highly configurable, allowing you to meet critical illumination and energy management requirements while providing an appearance appropriate to the theme of any space.

10

CFL- TRT Lamps Only Standard Gotham Optics		HORIZONTALLY LAMPED		
		1LAMP	2LAMP	3LAMP
10" Open		26-57 Watt TRT	26-57 Watt TRT	26-42 Watt TRT
10" Lensed		26-57 Watt TRT	26-57 Watt TRT	26-42 Watt TRT
10" Cross Baffle		26-57 Watt TRT	26-57 Watt TRT	26-42 Watt TRT
10" Candeo		26-57 Watt TRT	26-57 Watt TRT	26-42 Watt TRT

14

CFL- TRT Lamps Only		VERTICALLY LAMPED			
		1LAMP	2LAMP	3LAMP	4LAMP
14" W/O Glass Accent		26-57 Watt TRT	26-57 Watt TRT	26-42 Watt TRT	26-42 Watt TRT
14" W/ Glass Accent*		26-57 Watt TRT	26-57 Watt TRT	26-42 Watt TRT	26-42 Watt TRT
Metal Halide ED17/BT28 Only		VERTICALLY LAMPED SINGLE LAMP ONLY			
14" W/O Glass Accent		150-320 Watt			
14" W/ Glass Accent*		150-320 Watt			

*Glass accent available in white, blue and amber.

Modular ballast housing design utilizes either 10" or 14" apertures depending on source, wattage, or aperture treatment desired.

ORDERING INFORMATION

COMPACT FLUORESCENT
PDPF

SERIES	# OF LAMPS	WATTAGE / LAMP	APERTURE/TRIM COLOR		FINISH	LENS TYPE	VOLT.	COLOR					
PDPF	1/	26TRT	14AR	Clear	10MB ²	Black Baffle (black painted flange standard)	(blank)	Semi-specular	(blank)	No lens	MVOLT ⁴	B	Matte Black
	2/	32TRT	14PR	Pewter			LD	Matte-diffuse	CGL	Clear safety lens	120	S	Satin Silver
	3/	42TRT	14UBR	Umber	10BC ²	Black Cone			T73	Tempered	277	W	White
	4/	57TRT ¹	14WTR	Wheat	10BC ^{2,3}	Clear Cross Baffle				prismatic lens	347		
			10AR ²	Clear	10DW ²	Snow							
			10PR ²	Pewter	10DG ²	Sea							
			10UBR ²	Umber	10DB ²	Sky							
			10WTR ²	Wheat	10DT ²	Sand							
					10DR ²	Ruby							

GLASS ELEMENT ⁶	MOUNTING	STEM OPTIONS
(blank) No glass	PM ⁷ Pendant 3/8" thread mount	CYS ⁹ 3/8" Stem and canopy with 5° hang straight swivel
DWG White glass		CRS ⁹ 3/8" Stem and canopy with 45° swivel
DAG Amber glass	ACC ⁸ Aircraft cable and cord	
DBG Blue glass		

BALLAST ¹⁰	OPTIONS
(blank) Electronic Ballast	DS ¹³ Dual switching (shipped separately)
ADEZ ¹ Advance Mark 10 [®] electronic dimming blast. Minimum dimming level 5%.	GLR ¹⁴ Fast-blow fuse
DMHL ^{11,12} Electronic dimming blast. Minimum dimming level 5%.	GMF ¹⁴ Slow-blow fuse
S5 ^{11,12} SIMPLY5 system ballast	EL Emergency battery pack with integral test switch. 3 lamp, 42W maximum.
	EL2LP Emergency battery pack with integral test switch and 2 lamp emergency operation. 3 lamp, 32W maximum.
	WLP With 3500°K lamp (shipped separately)

- NOTES**
- 1 Available in 1 or 2 lamp only.
 - 2 Available in 1, 2 or 3 lamp only.
 - 3 Consult factory for additional reflector options.
 - 4 Multi-volt electronic ballast capable of operating on any line voltage from 120V through 277V, 50 or 60 HZ.
 - 5 Additional architectural colors available; please see brochure 794.3 or visit gothamlighting.com for more information.
 - 6 Available in 14" aperture only.
 - 7 Available with CYS or CRS stem option only.
 - 8 Provided with 10ft. aircraft cable and black cord. White cord standard with white pendant. Consult factory for additional lengths.
 - 9 For use with pendant mount (PM) units only. Length of stem must be specified (from 12" to 48" in 2" even increments). EX: CYS12. Longer lengths available with couplers. Consult factory for exterior use.
 - 10 For additional ballast types, refer to Technical Bulletins tab.
 - 11 Available in 120V or 277V only.
 - 12 Not available with 57TRT.
 - 13 Standard on 3 and 4 lamp fixtures.
 - 14 Not available with MVOLT. Must specify voltage.

METAL HALIDE
PDPH

SERIES	WATTAGE/LAMP ¹	APERTURE/TRIM COLOR	FINISH	LENS TYPE	VOLT	COLOR ²	GLASS ELEMENT
PDPH	150M 150W ED17	Clear	Semi-specular	(blank)	No lens	Matte Black	(blank) No glass
	175M 175W ED28	Pewter	Matte diffuse	CGL	Clear safety lens	Satin Silver	DWG White glass
	250M 250W ED28	Umber				White	DAG Amber glass
	320M 320W ED28	Wheat					DBG Blue glass
	150W ED17						
	250W ED28						
	320W ED28						

MOUNTING	STEM OPTIONS	BALLAST	OPTIONS
PM ³ Pendant 3/8"	CYS ⁵ 3/8" Stem and canopy with 5" hang straight swivel	(blank) Pulse-start magnetic ballast	WLP With 3000°K lamp shipped separately
ACC ⁴ Aircraft cable and cord	CRS ⁵ 3/8" Stem and canopy with 45° swivel	HEB ⁶ Electronic ballast	QRS ⁷ Quartz restrike system (DC lamp by others)
			QRSTD ⁷ Quartz restrike system with time delay (DC lamp by others)
			EC External emergency power source (DC lamp by others)
			SF Single Fuse (120V, 277V or 347V)

- 1 Recommended for use with coated lamps.
- 2 Additional architectural colors available; please see brochure 794.3 or visit gothamlighting.com for more information.
- 3 Available with CYS or CRS stem option only.
- 4 Provided with 10ft. aircraft cable and black cord. White cord standard with white pendant. Consult factory for additional lengths.
- 5 For use with pendant mount (PM) units only. Length of stem must be specified (from 12" to 48" in 2" even increments). EX: CYS12. Longer lengths available with couplers. Consult factory for exterior use.
- 6 Available with 150W only; 120V or 277V only.
- 7 Not available with HEB.

gotham[®]

GOTHAM ARCHITECTURAL DOWNLIGHTING
A DIVISION OF ACUITY LIGHTING GROUP, INC.
1400 Lester Rd Conyers, Georgia 30012
P 800 315 4982 F 770 860 3129
www.gothamlighting.com
An **Acuity** Brands Company