

Gotham Architectural Downlighting
Compact Fluorescent Downlights

8" AF
Cross Baffle Reflector

Horizontal Lamp
Triple-Tube

FEATURES

OPTICAL SYSTEM

- Self-flanged, semi-specular or matte-diffuse reflector. Patented Bounding Ray™ Optical Principle design (US Patent No. 5,800,050). Minimum flange matches reflector finish.
- Cross baffle offers superior optical cut-off with a clean aperture appearance.
- Hinged lampdoor seals upper trim for optimal fixture efficiency and the reduction of stray light in the plenum.

MECHANICAL SYSTEM

- 16-gauge galvanized steel construction; maximum 1-1/2" ceiling thickness.
- Telescopic mounting bars maximum of 32" and minimum of 15", preinstalled, 4" vertical adjustment.
- Toolless adjustments post-installation.
- Junction box capacity: 8 (4 in, 4 out) 12AWG rated for 90°C.

ELECTRICAL SYSTEM

- Horizontally mounted, positive-latch, thermoplastic socket(s).
- Class P, thermally protected high-power-factor electronic ballast mounted to the junction box.
- SIMPLY5™ technology available.

LISTING

- Fixtures are UL Listed for thru-branch wiring, non-IC recessed mounting and damp locations. Listed and labeled to comply with Canadian standards.

WARRANTY

- 1-year limited warranty. Complete warranty terms located at www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx

EXAMPLE: AF 2/32TRT 8CB CGL MVOLT

Series	Wattage/Lamp	Aperture/Trim color	Finish	Lens type	Voltage	Ballast ²
AF	1/13TRT	8CB Clear	(blank) Semi-specular	(blank) No lens	MVOLT ¹	(blank) Electronic ballast
	1/18TRT		LD Matte-diffuse	CGL Clear glass lens	120	ECOS ^{1,3} Lutron® EcoSystem® electronic dimming ballast. Minimum dimming level 5%
	1/26TRT			T73 Tempered prismatic lens	277	ADEZ ^{3,4} Advance Mark 10® electronic dimming ballast. Minimum dimming level 5%
	1/32TRT				347	ADZT ¹ Advance Mark 7® electronic dimming ballast. Minimum dimming level 5%
	1/42TRT					
	1/57TRT					
	2/13TRT					
	2/18TRT					
	2/26TRT					
	2/32TRT					
2/42TRT						

Options

ELR⁵	Emergency battery pack with remote test switch	TRBL	Black painted flange	BDP^{7,8}	Ballast disconnect plug
ELRHL⁵	High-lumen-output emergency battery pack with remote test switch	WLP	With 3500 K lamp (shipped separately)	HW	Hardwire for S5 system; replaces RELOC®
GMF⁴	Single, slow-blow fuse	DS	Dual switching	NEPP	Interface for Sensor Switch® nLight® network with integral power supply. refer to TN-623-01.
GLR⁴	Single, fast-blow fuse	RRL⁶	RELOC®-ready luminaire. Provides compatibility with Lithonia RELOC system. Access above ceiling required.	WL	Wet location; lens required
TRW	White painted flange	CP⁷	Chicago plenum	WRL⁹	Wattage restriction label
				TWS	Twist lock socket



ACCESSORIES order as separate catalog numbers (shipped separately)

SCA8 Sloped ceiling adapter. Degree of slope must be specified (10D, 15D, 20D, 25D, 30D). Ex: SCA8 10D.

ORDERING INFORMATION

DIMENSIONAL DATA

All dimensions are inches (centimeters) unless otherwise noted.

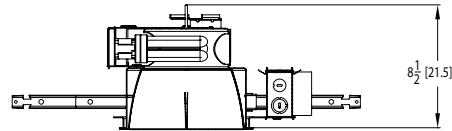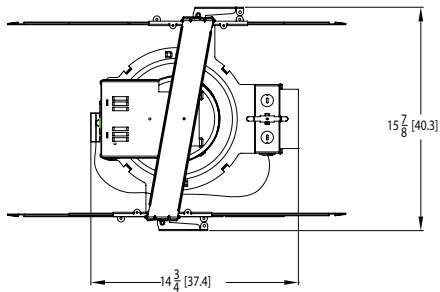

- Aperture: 7-7/8 (20.1)
- Ceiling Opening: 8-7/8 (22.5)
- Overlap Trim: 9-1/4 (23.5)
- Lens recess: 4-1/2 (11.4)

NOTES


ORDERING NOTES

- | | |
|---|--|
| <ol style="list-style-type: none"> 1. Multi-volt electronic ballast capable of operating on any voltage from 120V through 277V, 50 or 60 Hz. 2. For additional ballast types, refer to TECH-250. 3. Not available with 13W or 57W. 4. Available in 120V or 277V only. | <ol style="list-style-type: none"> 5. For dimensional changes, refer to TECH-140. 6. For compatible RELOC systems, refer to TECH-110. 7. Not available with emergency options. 8. Meets codes that require in-fixture disconnect. 9. Must specify wattage. Ex.: WRL32 |
|---|--|

Distribution Curve Distribution Data Output Data Coefficient of Utilization Illuminance: Single Luminaire 30" Above Floor

AF 1/32TRT 8CB


(1) CF32DT/E/IN/835, 2400 LUMENS PER LAMP, 1.2 S/MH, TEST NO. LTL9608

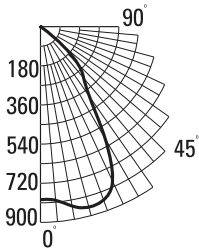

From 0°	cp.	Lumens	Zone	Lumens	%lamp	pf	pc	pw	80%		20%		50%		Mount height	Initial fc at beam center	50% beam angle 61.3°		10% beam angle 90.1°	
									50%	30%	50%	30%	50%	30%			Beam diameter	fc at beam edge	Beam diameter	fc at beam edge
0°	796		0°-30°	603.1	25.1	1	50	49	49	48	47	47			8'	26.3	6.5	13.2	11.0	2.6
5°	801	68	0°-40°	895.7	37.3	2	46	44	45	44	44	42			10'	14.2	8.9	7.1	15.0	1.4
15°	859	201	0°-60°	1092.6	45.5	3	42	40	42	39	41	39			12'	8.8	11.3	4.4	19.0	0.9
25°	783	333	0°-90°	1099.5	45.8	4	39	36	39	36	38	35			14'	6.0	13.6	3.0	23.0	0.6
35°	392	293	90°-180°	0.0	0.0	5	36	33	36	33	35	32			16'	4.4	16.0	2.2	27.1	0.4
45°	248	166				6	33	30	33	30	32	30								
55°	21	31				7	31	28	31	28	30	27								
65°	4	5				8	29	26	28	26	28	25								
75°	2	2				9	27	24	27	24	26	23								
85°	0	0				10	25	22	25	22	24	22								
90°	0	0																		

AF 1/42TRT 8CB


(1) CF42DT/E/IN/835, 3200 LUMENS PER LAMP, 1.2 S/MH, TEST NO. LTL9607

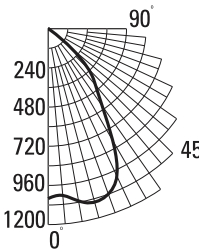

From 0°	cp.	Lumens	Zone	Lumens	%lamp	pf	pc	pw	80%		20%		50%		Mount height	Initial fc at beam center	50% beam angle 62.3°		10% beam angle 90.1°	
									50%	30%	50%	30%	50%	30%			Beam diameter	fc at beam edge	Beam diameter	fc at beam edge
0°	1041		0°-30°	866.7	27.1	1	54	53	53	52	51	50			8'	34.4	6.6	17.2	11.0	3.4
5°	1025	97	0°-40°	1273.6	39.8	2	49	47	49	47	47	45			10'	18.5	9.1	9.3	15.0	1.9
15°	1100	299	0°-60°	1560.2	48.8	3	45	43	45	42	43	41			12'	11.5	11.5	5.8	19.0	1.2
25°	995	470	0°-90°	1571.3	49.1	4	42	39	41	38	40	38			14'	7.9	13.9	3.9	23.0	0.8
35°	574	407	90°-180°	0.0	0.0	5	39	35	38	35	37	35			16'	5.7	16.3	2.9	27.1	0.6
45°	348	232				6	36	32	35	32	35	32								
55°	41	55				7	33	30	33	30	32	29								
65°	7	8				8	31	27	31	27	30	27								
75°	2	3				9	29	25	28	25	28	25								
85°	0	0				10	27	24	27	24	26	23								
90°	0	0																		

AF 2/32TRT 8CB


(2) CF32DT/E/IN/835, 2400 LUMENS PER LAMP, 1.2 S/MH, TEST NO. LTL9610

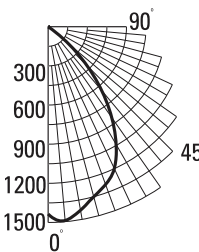

From 0°	cp.	Lumens	Zone	Lumens	%lamp	pf	pc	pw	80%		20%		50%		Mount height	Initial fc at beam center	50% beam angle 61.3°		10% beam angle 90.1°	
									50%	30%	50%	30%	50%	30%			Beam diameter	fc at beam edge	Beam diameter	fc at beam edge
0°	1435		0°-30°	1136.6	23.7	1	47	46	46	45	44	44			8'	47.4	6.5	23.7	11.0	4.7
5°	1491	139	0°-40°	1695.5	35.3	2	43	41	43	41	41	40			10'	25.5	8.9	12.8	15.0	2.6
15°	1349	407	0°-60°	2045.0	42.6	3	40	38	39	37	38	36			12'	15.9	11.3	8.0	19.0	1.6
25°	1199	591	0°-90°	2058.0	42.9	4	37	34	36	34	35	33			14'	10.9	13.6	5.4	23.0	1.1
35°	850	559	90°-180°	0.0	0.0	5	34	31	34	31	33	30			16'	7.9	16.0	3.9	27.0	0.8
45°	420	300				6	31	29	31	28	30	28								
55°	41	49				7	29	26	29	26	28	26								
65°	9	9				8	27	24	27	24	26	24								
75°	3	3				9	25	23	25	22	23	21								
85°	1	1				10	24	21	24	21	23	21								
90°	0	0																		

AF 2/42TRT 8CB

(2) CF42DT/E/IN/835, 3200 LUMENS PER LAMP, 1.2 S/MH, TEST NO. LTL9611

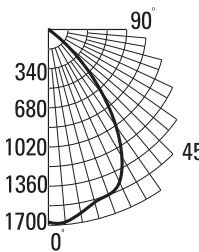

From 0°	cp.	Lumens	Zone	Lumens	%lamp	pf	pc	pw	80%		20%		50%		Mount height	Initial fc at beam center	50% beam angle 60.8°		10% beam angle 89.1°	
									50%	30%	50%	30%	50%	30%			Beam diameter	fc at beam edge	Beam diameter	fc at beam edge
0°	1671		0°-30°	1312.5	20.5	1	40	39	40	39	38	37			8'	55.2	6.5	27.6	10.8	5.5
5°	1678	162	0°-40°	1953.2	30.5	2	37	36	37	35	35	34			10'	29.7	8.8	14.9	14.8	3.0
15°	1553	470	0°-60°	2338.7	36.5	3	34	32	34	32	33	31			12'	18.5	11.2	9.3	18.7	1.9
25°	1461	681	0°-90°	2352.7	36.8	4	32	29	31	29	30	29			14'	12.6	13.5	6.3	22.6	1.3
35°	1025	641	90°-180°	0.0	0.0	5	29	27	29	27	28	26			16'	9.2	15.9	4.6	26.6	0.9
45°	435	332				6	27	25	27	24	26	24								
55°	47	54				7	25	23	25	23	24	22								
65°	10	10				8	23	21	23	21	23	21								
75°	4	3				9	22	19	22	19	21	19								
85°	0	1				10	20	18	20	18	20	18								
90°	0	0																		

PHOTOMETRY NOTES

- Tested to current IES and NEMA standards under stabilized laboratory conditions.
- Actual performance may differ as a result of end-user environment and application.
- Consult factory or IES file for microgroove baffle, black cone or other photometric reports.