

Gotham Architectural Downlighting  
Compact Fluorescent Cylinders

**10" CF  
Cylinders**

Horizontal Lamp, Double Twin-Tube or Triple-Tube,  
6" Aperture

FEATURES

**OPTICAL SYSTEM**

- Self-flanged, semi-specular or matte-diffuse reflector. Patented Bounding Ray™ Optical Principle design (U.S. Patent No. 5,800,050) provides lamp before lamp image and smooth transition from top of reflector to bottom.

**HOUSING**

- Heavy-gauge aluminum housing with integral bottom deck for clean appearance. Matte white textured polyester powder paint finish standard.
- Reveal on standard ceiling and optional pendant mount give floating luminaire appearance.

**MOUNTING**

- Standard ceiling mount provided with mounting pattern for direct installation to 3-1/4" and 4" octagonal or 4" square junction box.
- Optional wall mount provided with mounting pattern for direct installation to 4" square or octagonal junction box.
- Optional pendant mounting entry provided for 3/8" National Pipe Thread stem. Mounting accessories available (see Accessories).

**ELECTRICAL SYSTEM**

- Horizontally mounted, four-pin, positive-latch thermoplastic socket(s).
- Class P, thermally protected, high-power-factor electronic ballast(s).

**LISTING**

- Fixtures are UL Listed for damp locations. Listed and labeled to comply with Canadian standards.

**WARRANTY**

- 1-year limited warranty. Complete warranty terms located at [www.acuitybrands.com/CustomerResources/Terms\\_and\\_conditions.aspx](http://www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx)

ORDERING INFORMATION

**EXAMPLE: CF10 2/26DTT 6AR 120 DWHG**

Series	Wattage/Lamp	Trim color	Finish	Voltage	Ballast	Mounting <sup>4</sup>
CF10	1/13DTT	1/13TRT	6AR Clear	MVOLT <sup>1</sup> 120 277 347	(blank) Electronic ballast	(blank) Ceiling mount
	2/13DTT	1/18TRT	6PR Pewter		ECOS <sup>1,2</sup> Lutron® EcoSystem® electronic dimming ballast. Minimum dimming level 5%	PM <sup>5</sup> Pendant 3/8" thread mount
	1/18DTT	1/26TRT	6WTR Wheat		ADEZ <sup>2,3</sup> Advance Mark 10® electronic dimming ballast. Minimum dimming level 5%	WM Wall mount
	2/18DTT	1/32TRT			ADZT <sup>1</sup> Advance Mark 7® electronic dimming ballast. Minimum dimming level 5%	
	1/26DTT	1/42TRT				
	2/26DTT					

Options

WLP	With 3500 K lamp (shipped separately)	DNA	Natural aluminum
GMF <sup>3</sup>	Single slow-blow fuse	DDB	Dark bronze
GLR <sup>3</sup>	Single fast-blow fuse	DWH	Gloss white
<b>Architectural Colors - Powder Paint<sup>6</sup></b>			
DWHG	Matte white (standard)		
DBL	Black		

ACCESSORIES order as separate catalog numbers (shipped separately)

CYS <sup>7</sup>	3/8" stem and canopy with 5° "hang straight" swivel
CRS <sup>7</sup>	3/8" stem and canopy with 45° swivel
nSP5 D	Sensor Switch® nLight® 0-10V dimming relay. Requires additional nLight bus power supply (nPS 80)


**10" CF  
Cylinders**

Horizontal Lamp, Double Twin-Tube or Triple-Tube, 6" Aperture




DIMENSIONAL DATA

All dimensions are inches (centimeters) unless otherwise noted.



Reflector Aperture: 6-1/4 (15.9)  
Housing Diameter: 9-3/4 (24.8)

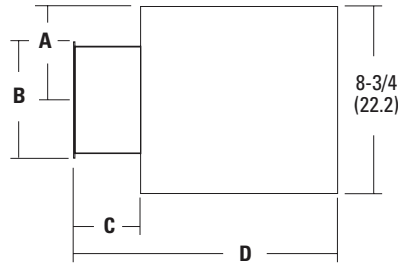

**Wall Mount Dimensions**

A = 4-1/4 (10.8)  
B = 5-5/16 (13.5)  
C = 3-1/4 (8.3)  
D = 13 (33.0)

NOTES

**ORDERING NOTES**


1. Multi-volt electronic ballast capable of operating on any line voltage from 120V through 277V, 50 or 60 Hz.
2. Not available with 13W.
3. Available in 120V or 277V only.
4. Wires supplied by others.
5. Stem not included.
6. Additional architectural colors available; see [www.lithonia.com/archcolors](http://www.lithonia.com/archcolors).
7. Color and length of stem must be specified (from 6" to 240" in even increments in maximum sections of 48"). Ex.: CYS06 DWHG. Ceiling attachment for interior use. Consult factory for exterior use. Wire not included.



Distribution Curve    Distribution Data    Output Data    Coefficient of Utilization    Illuminance: Single Luminaire 30" Above Floor


**CF10 1/26TRT 6AR**

(1) 26W CF26DT/E/IN/835 LAMP, 1.2 S/MH, 1800 RATED LUMENS PER LAMP, TEST NO. LTL9391

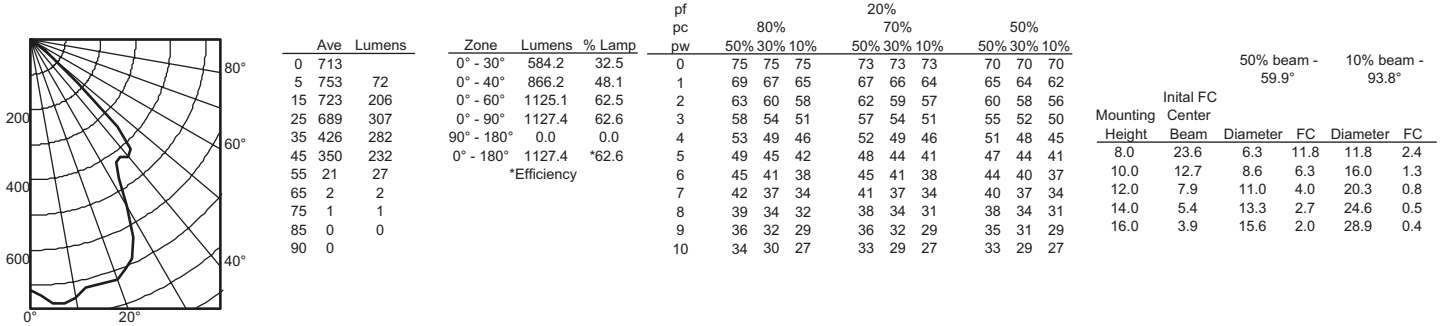


**CF10 1/32TRT 6AR**

(1) 32W CF32DT/E/IN/835 LAMP, 1.2 S/MH, 2400 RATED LUMENS PER LAMP, TEST NO. LTL9390

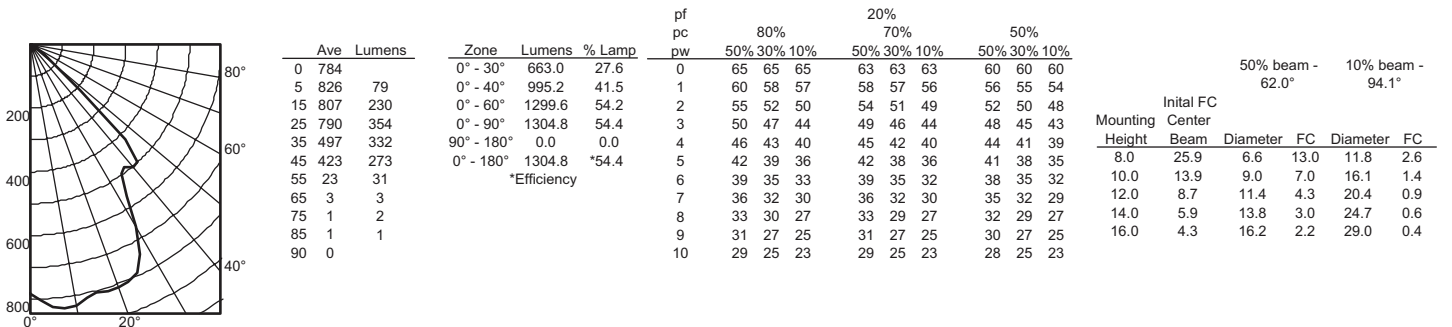

**CF10 1/42TRT 6AR**

(1) 42W CF42DT/E/IN/835 LAMP, 1.2 S/MH, 3200 RATED LUMENS PER LAMP, TEST NO. LTL9521

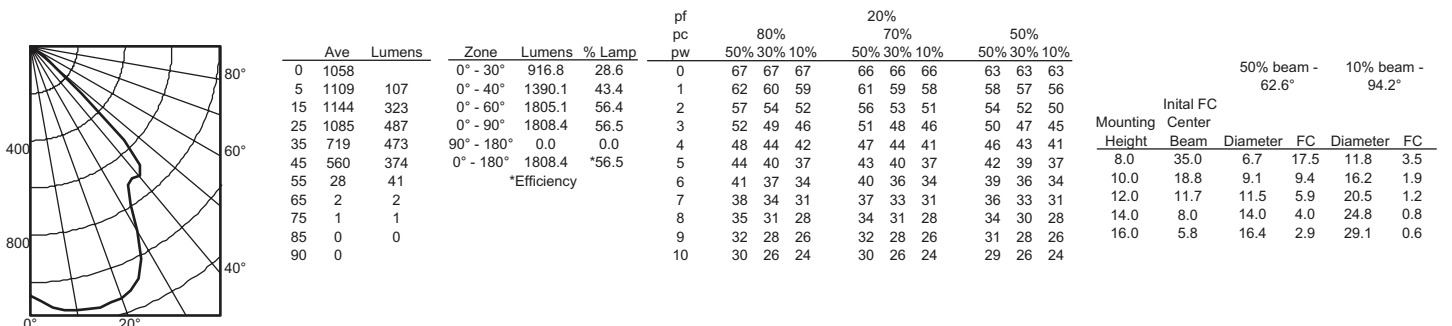

**PHOTOMETRY NOTES**

- Tested to current IES and NEMA standards under stabilized laboratory conditions.
- Actual performance may differ as a result of end-user environment and application.
- Consult factory or IES file for microgroove baffle, black cone or other photometric reports.

**10" CF  
Cylinders**

Horizontal Lamp, Double Twin-Tube or Triple-Tube, 6" Aperture




PHOTOMETRY

Distribution Curve    Distribution Data    Output Data    Coefficient of Utilization    Illuminance: Single Luminaire 30" Above Floor

**CF10 2/26DTT 6AR**

(2) 26W CF26DD/E/835 LAMPS, 1.3 S/MH, 1825 RATED LUMENS PER LAMP, TEST NO. LTL13330P



Ave	Lumens	Zone	Lumens	% Lamp	pf pc pw	80%			20% 70%			50%		
						50%	30%	10%	50%	30%	10%	50%	30%	10%
0	957	0° - 30°	832.1	22.8	0	59	59	59	58	58	58	55	55	55
5	1003	0° - 40°	1336.5	36.6	1	55	53	52	53	52	51	51	50	49
15	1059	0° - 60°	1816.9	49.8	2	50	47	45	49	47	45	47	46	44
25	950	0° - 90°	1820.9	49.9	3	46	43	40	45	42	40	43	41	39
35	805	90° - 180°	0.0	0.0	4	42	38	36	41	38	36	40	37	35
45	530	0° - 180°	1820.9	*49.9	5	38	35	32	38	34	32	37	34	32
55	58			*Efficiency	6	35	31	29	35	31	29	34	31	29
65	2				7	32	29	26	32	28	26	31	28	26
75	1				8	30	26	24	29	26	24	29	26	24
85	0				9	28	24	22	27	24	22	27	24	22
90	0				10	26	22	20	25	22	20	25	22	20

Mounting Height	Initial FC Center		50% beam - 67.0"		10% beam - 98.4"	
	Beam	Diameter	FC	Diameter	FC	FC
8.0	31.6	7.3	15.8	12.7	3.2	
10.0	17.0	9.9	8.5	17.4	1.7	
12.0	10.6	12.6	5.3	22.0	1.1	
14.0	7.2	15.2	3.6	26.6	0.7	
16.0	5.3	17.9	2.6	31.3	0.5	

**PHOTOMETRY NOTES**

- Tested to current IES and NEMA standards under stabilized laboratory conditions.
- Actual performance may differ as a result of end-user environment and application.
- Consult factory or IES file for microgroove baffle, black cone or other photometric reports.

